



Product Bulletin
#2230C

"products of the future that you can use today"

213 Freeman Street, Brooklyn, New York 11222 (800) 394-8351 (718) 383-8351
Fax: (718) 383-0008 www.nuvitechemical.com




Nuvite PowerPol II is a fast, extraordinarily easy to use, and effective cleaner and polish for ongoing care of painted, composite, chrome plated or clearcoated surfaces. It is easily applied with a simple and easy to use, wipe-on, wipe-off procedure. -No power tools required! PowerPol II is a high technology formulation that offers cleaning power, a bright, glossy shine, and a protective barrier coating against surface oxidation that also protects against ultraviolet deterioration. Works great for cleaning and restoring gloss on composites in marine and RV applications, too. And because PowerPol II is so easy and fast to use, it can literally save you manhours in labor while giving maximum appearance protection and performance—even in fleet and heavy service use!

PowerPol II

- Exceptional Soil Dispersion Power
- Removes Dirt, Oil and Minor Stains & Oxidation from Paint, Plastic and Metal Surfaces
- Easy Wipe On, Let Dry, Wipe Off to a Clean, Bright Surface
- Safe to Normal Paints and Clearcoats
- Adds a Beautiful Gloss Appearance with an Effective Ultraviolet Protectant Coating
- Extraordinarily Easy to Use
- Preserves and Protects Substrate From Further Oxidation and Leaves a Protective Coating Against U/V and Atmospheric Corrosion/Salt Spray/ Pollution Without Color Change
- Offers Superior Cleaning Results and Protection With Fewer Man-Hours

Thanks to Carl Ward—'66 Vette

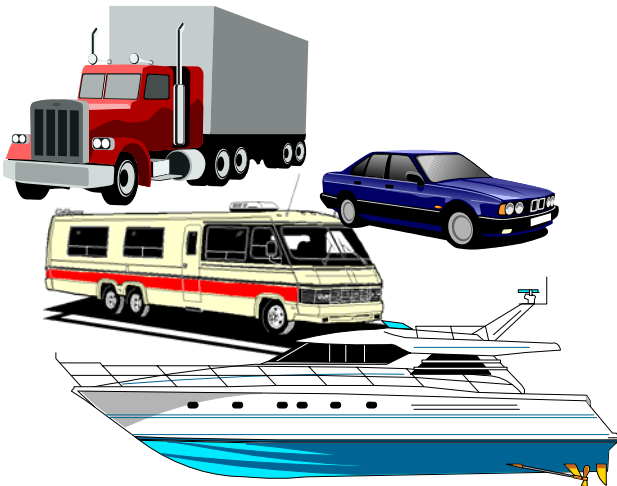



Specifications:

Appearance: -tan, semi-viscous liquid
Odor: -mild
pH -10.6-10.8 @ 25 degrees C
Solubility: -dispersible in water
Specific Gravity: -0.961 @ 25 degrees C

Availability:

1 & 5 Gallon or 15, 20, 30 and 55 Gallon Drums

Effect on Materials:

Nuvite PowerPol II conforms to SAE standards and requirements of

- AMS 1650
 - Boeing D6-17487
 - Douglas CSD #1
- for safety to bare and clad 2024, 7075, 2524 aluminum, cadmium plated steel, mild steel, high-strength steel, Plexiglas, and paint.

Health and Safety:

Nuvite PowerPol II contains petroleum distillates. Users with sensitive skin should wear gloves and eye protection as standard safety procedures when using fluids. Refer to PowerPol II Material Safety Data Sheet for further detailed information.


Directions For Use:

For Normal or Lightly Soiled Surface Conditions: Apply PowerPol II "as is" by hand or cotton mop to small areas at a time. Agitate area evenly with wet material. Allow to fully dry (usually no more than 5-15 minutes depending on humidity conditions). Remove dry white haze by fluff buffing with clean terry towel or mophead to slick, intense shine. For maximum gloss longevity and protection, follow with Nuvite GlāzPFS PolyFluoro Sealant

For Heavily Soiled Surface Conditions: For grease, oil, hydraulic oil buildup, it is recommended that the area be wiped down or wet washed with Nuvite CitriCut or SS 9-3 degreasing cleaners prior to the use of PowerPol II, then proceed as above. Contact Nuvite representatives for further information and assistance.

For Dull, Oxidized Paint: Use Nuvite NuPol SS Heavy Duty Cleaner and Surface Restorer prior to using PowerPol II to restore gloss and shine. Follow up with application of PowerPol II as described above to final high gloss finish.

When using Nuvite materials, please refer to the appropriate procedures and recommendations for use and equipment, or consult with your Nuvite representatives for further information and demonstrations.

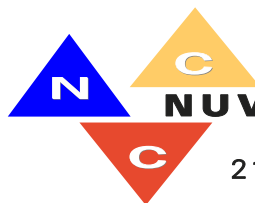

NUVITE CHEMICAL COMPOUNDS
C O R P O R A T I O N

213 FREEMAN STREET, BROOKLYN, NEW YORK 11222

Phone (800)394-8351 Fax (718)383-0008

www.nuvitechemical.com